



ImageSensing
systems

MAKING YOUR ROADWAYS SAFER.



Wrong Way Alerting Solution

The Wrong Way Alerting Solution is a robust system that provides reliable wrong way driver detection on ramps and gives transportation agencies deeper insights that can help in developing effective strategies and resolutions to this challenging problem.

The wrong way module detects wrong way vehicles and sends an automated message alert with an image snapshot to ISS Alert Trust, where event verification occurs reducing the time consuming task of having agency operators validate events. Once the event has been confirmed, an automated message alert with an image snapshot is sent via email, multi-media message (MMS), or the wrong way API to the Traffic Management Center central management software. The system also provides a 30-second four-quadrant video of the event, allowing traffic operators to visually observe if the vehicle has self-corrected or continued onto the highway.

Drivers wrongfully entering the highway from an off-ramp pose a serious safety risk and can result in injury or fatalities. This solution provides insights to help improve the safety performance of roadways.

KEY BENEFITS

- Fast, safe installation with no traffic disruptions
- Multi-directional camera gives a 360° view of the ramp
- Monitor any portion of the ramp with a single zone
- Provides a visual verification snapshot of wrong way detection
- ISS Alert Trust provides a highly accurate and validated true wrong way event
- Automated message alerts with snapshot via email and MMS
- Integrates via the wrong way API to the Traffic Management Center central management software
- Simple to setup and configure
- Pre and post video event capture and storage of incident

Wrong Way Alerting Solution

SPECIFICATION

Wrong Way Processor

Power

- Operates on 5 VDC @ 1.5W max standard
- Power supply operates on 110 - 240 VAC

Processor

- ARM A9 with 1 GHz Quad Core
- Integrated real-time clock with battery backup

Storage

- 4GB flash storage
- All device data is retained in nonvolatile memory

Communications

- Ethernet 10/100/1000
- Wired per TIA-568

Mechanical

- Dimensions: 114 x 76 x 29 mm (4.5 x 3 x 1.125 in)
- Weight: 0.23 kg (0.5 lb)

Maintainability

- Ultra reliable: MTBF (mean time between failures) designed for 90,000 hours (10 years) estimated based on component quality and manufacturing techniques

Environmental Conditions

- Temperature range
-40° to +74°C (-40° to 165°F)

Warranty

- 2-year warranty

Regulatory

- FCC
- NEMA TS2-2003
- CE EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3
- ICES 003

Camera

Power

- Power over Ethernet (POE) IEEE 802.3at Type 2 Class 4
- IR illumination on: class 4, typical 11.1 W, max 17.0 W

Lens

- Varifocal, 3-6 mm, F1.8-2.6
- 4x1080p capture mode:
Horizontal field of view: 96° - 49°
Vertical field of view: 53° - 27°
Diagonal field of view: 113° - 55°

IR Illumination

- Four individually controllable IR with power-efficient, long-life 850 nm IR LEDs
- Range of reach 15m (50 ft)

Video Compression

- H.264 (MPEG-4 Part 10/AVC)

Communications

- Shielded RJ45 10BASE-T/100BASE-TX PoE
- One IP address for all video channels

Mechanical

- Dimensions:
Height: 91.5 mm (3.6 in)
Radius: 255 mm (10.04 in)
- Weight: 2.0 kg (4.4 lb)

Environmental Conditions

- Temperature range
-30° to +50°C (-22° to 122°F)
- Humidity 10-100% RH (condensing)

Warranty

- 5-year warranty

Regulatory

- EN 55032 Class A, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 61000-6-1, EN 61000-602, FCC Part 15 Subpart B Class A
- IP66/67, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9)

External Contact Closure

Power

- 12 to 36 VDC
- 188 mA @ 24 VDC

Inputs and Outputs

- 6 channels
- Isolation: 3k VDC or 2k Vrms

Communications

- 2 switched 10/100 Mbps RJ45 ports
- Modbus/TCP (Slave), Ethernet/IP, SNMPv1/v2c, RESTful API, TCP/IP, UDP, DHCP, BOOTP, HTTP

Environmental Conditions

- Temperature range
-40° to +75°C (-40° to 167°F)

Warranty

- 2-year warranty

ISS Alert Trust


- Network Requirements:
Public IP address
Access to webserver port

CONTACTS

World Headquarters

1115 Hennepin Avenue
Minneapolis, MN 55403 USA
Phone: +1.651.603.7700
Fax: +1.651.305.6402
info@imagesensing.com
imagesensing.com

Wrong Way System Event Flow

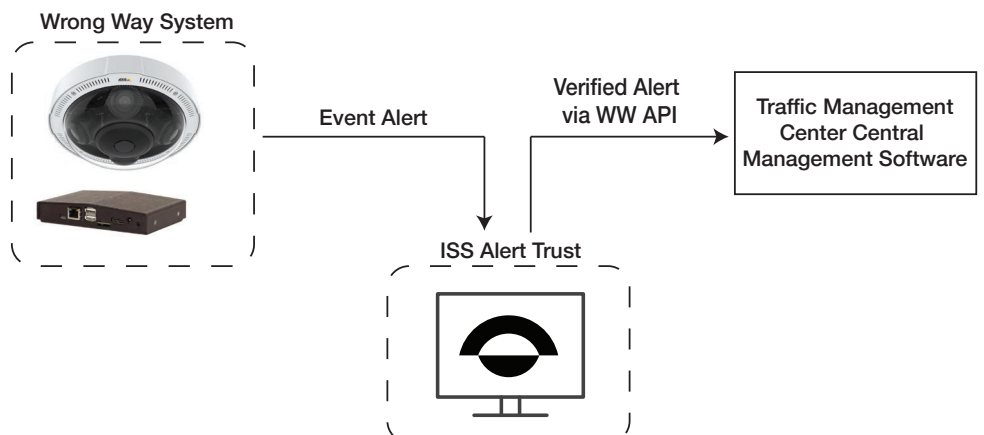

imagesensing.com

Due to ISS' continuous efforts to develop the products that are most responsive to our customer's needs, the above specifications are subject to change. To verify the current information, please visit the Image Sensing Systems website.

©2022 Image Sensing Systems, Inc. Part Number: 5000-1 Rev 220314